



LMR s.r.o., Svazarmovská 2287, 738 01 Frýdek – Místek, CZ



MONORAIL BRAKING WAGON

for heavy type hanging monorails
BTs type



BTs consists of the main and auxiliary braking wagons (interconnected both mechanically and hydraulically) and has been designed for the operation on hanging monorail of a heavy type (series ZD24, A, B, C, etc.) being used for haulage with a hanging locomotive, pertinently driven with infinite and/or open rope. BTs functioning secures the set of wagons and its elements (load-bearing wagons, loads, cabins for transport of persons, etc.) against going off and endangering the operational safety upon exceeding maximum permitted transport velocity such a way, that it would grip the rail section with its grips.



Phone / fax
+420 558 676 392


www.LMR.CZ
info@LMR.CZ

Mobile: +420 603 275 385
+420 603 279 088

VAT ID - BID
CZ 25395068

Technical Data:

- Operational velocity 0 - 2 m/s
- Maximum speed for giving the order to brake 3,2 ±4% m/s
- Maximum route inclination +/- 30°
- Minimum static braking force 65 kN
- Minimum dynamic braking force 58 kN
- Maximum braking stopping distance under a load as per the Graph 11 m
- Maximum delay for transport of persons 9,81 m/s²
- Minimum weight of braked set of wagons for transport of persons 2000 kg
- Weight 200 kg
- Working environment featured with dangerous atmospheric conditions as per the standard ČSN EN 1127-2 2

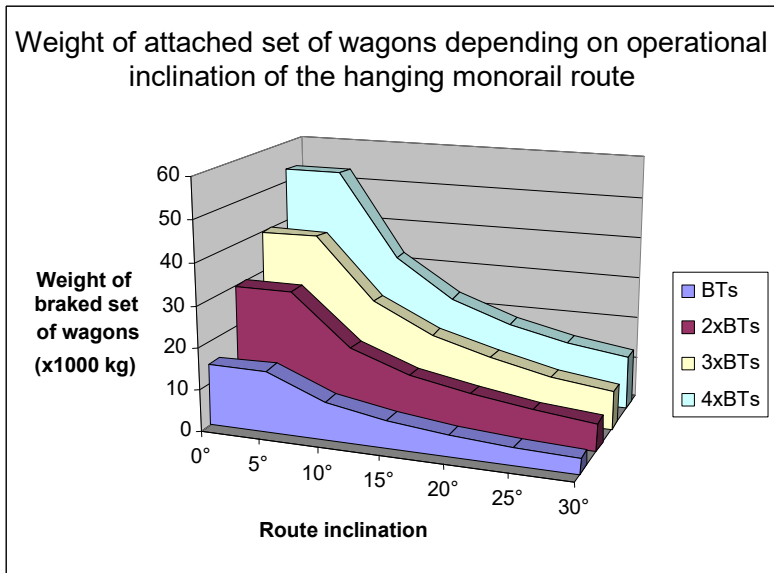

Route inclination	Max.weight of braked set of wagons (x1000kg)			
	BTs	2xBTs	3xBTs	4xBTs
0°	15	30	40	53,3
5°	15	30	40	53,3
10°	9,2	17,8	25,2	32,5
15°	6,7	12,8	18	23,4
20°	5,2	9,8	14,1	18,4
25°	4,3	7,7	11	15,3
30°	3,7	6,3	9	13,1

This supplement to the Instruction Manual determines the rules for possible connecting the monorail braking wagons of **BTs** type into couples, triplets, quadruple and/or more for the purpose of special haulage extraordinary heavy loads. Interconnection consists of mechanical and hydraulic elements.